

1700, Setlakwe Street  
 Thefford Mines (QC) G6G 8B2  
 CANADA  
 www.technometalpost.com

**CONFIDENTIAL**  
 THE INFORMATIONS CONTAINED  
 IN THIS DRAWING IS THE SOLE  
 PROPERTY OF TECHNO PIEUX INC.  
 ANY REPRODUCTION IN PART OR  
 AS A WHOLE WITHOUT THE WRITTEN  
 PERMISSION OF TECHNO METAL POST INC.  
 IS PROHIBITED

**REVISIONS**

| DATE | DESCRIPTION | REV. |
|------|-------------|------|
|      |             |      |
|      |             |      |
|      |             |      |
|      |             |      |
|      |             |      |

Client :

Client adress :


Project :

Drawing :  
**Techno Metal Post  
 Model P1  
 (Above ground light  
 structure)**

Approved by :

Date : 2011-10-31      Scale : N/A

Drawing no: P1-G-R0-A-USA      Page number : SHEET 1 OF 1

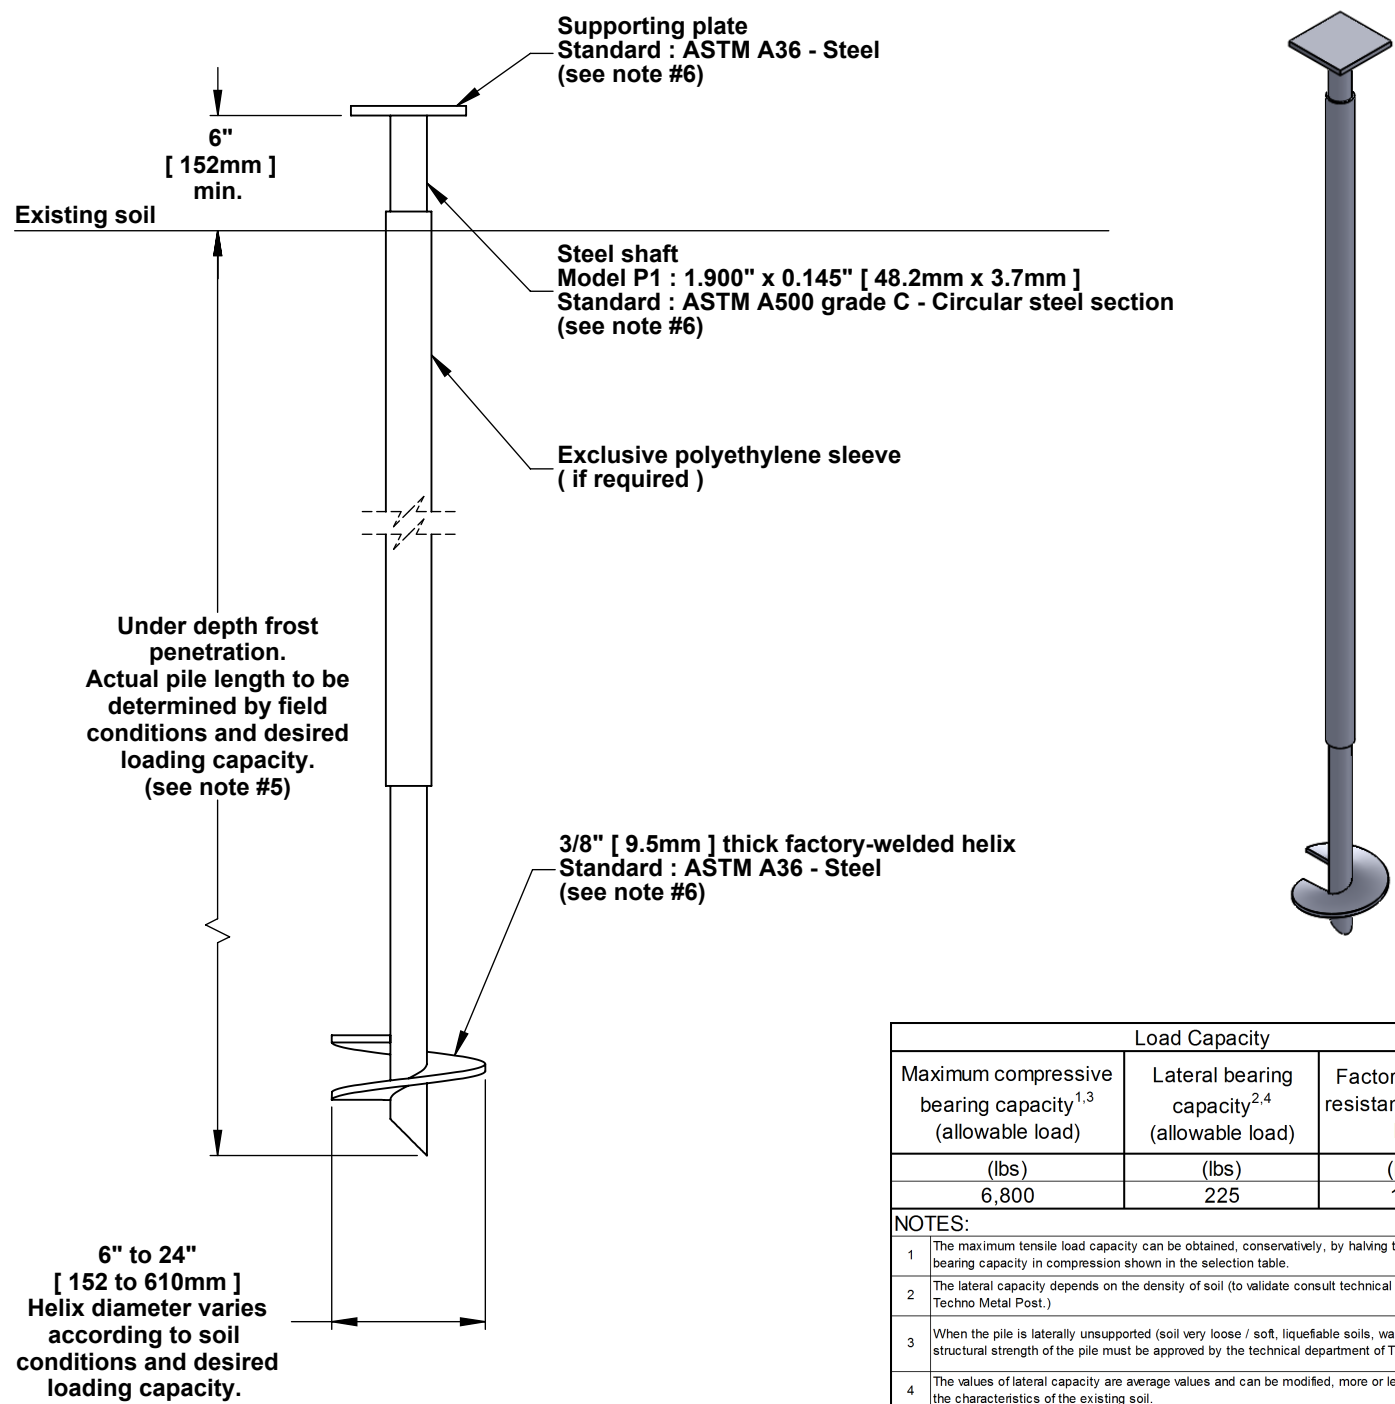

| Load Capacity  |  |   |
|--|--|---|
| Maximum compressive bearing capacity <sup>1,3</sup> (allowable load) | Lateral bearing capacity <sup>2,4</sup> (allowable load) | Factored bending resistance (ultimate load) |
| (lbs)  | (lbs)  | (lbs.ft)                                    |
| 6,800  | 225  | 1,010                                       |

- NOTES:**
- The maximum tensile load capacity can be obtained, conservatively, by halving the values of the bearing capacity in compression shown in the selection table.
  - The lateral capacity depends on the density of soil (to validate consult technical department of Techno Metal Post.)
  - When the pile is laterally unsupported (soil very loose / soft, liquefiable soils, water and air), the structural strength of the pile must be approved by the technical department of Techno Metal Post.
  - The values of lateral capacity are average values and can be modified, more or less, depending on the characteristics of the existing soil.
  - If required, piles may be field welded with extensions to achieve greater loading capacities in poor soil conditions.
  - If required, the helical pile and the supporting plate can be galvanized in compliance with standard ASTM A123