

Shaft

Wall Thickness	7.1 mm (0.280")
Round HSS Outside Diameter	168.3 mm (6.6")
Available Standard Lengths	2.1 m (7'-0") / 3.2 m (10'-6")


Load Specifications

Max. Allowable Capacity	225 kN (50,625 lb)
-------------------------	--------------------

Technical Specifications

Commonly Used Structure*	Heavy Residential Light to Heavy Commercial Industrial
Standard Steel	ASTM A500 Grade C Fy=350 MPa min (51 ksi)
Black Steel Design Life	Min 50 years
Coating	Galvanized or Black Steel
Galvanization Compliance	ASTM A123/A123M/A123M
Additional Corrosion Protection	Cathodic Protection System available

* Refer to the selection table on p.8.

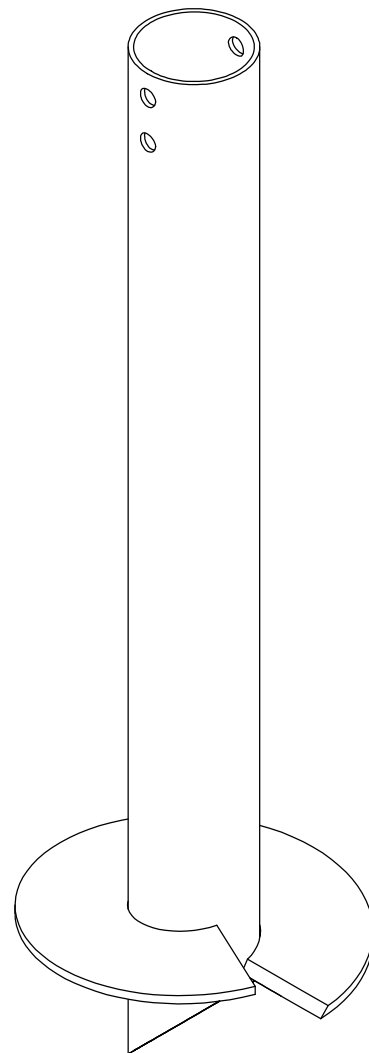

Helix

Pitch	127 mm (5")
Thickness	12.7 mm (0.5")
Standard Steel	CSA G40.21-300W Fy=300 MPa min (44 ksi)
Coating	Galvanized or Black Steel
Multiple Welded Helix	Available
Helix Size*	305 mm (12") to 610 mm (24")

* Other sizes available upon request.

